

重要提示

- 1、请在安装前仔细阅读此安装说明书；
- 2、该说明书包含产品说明和使用说明；
- 3、请您仔细阅读并妥善保管，以便在日后查询；
- 4、本安装使用说明书仅供用户正常使用；
- 5、特殊情况视具体情形而定。

安装所需工具

- 1、电钻及10MM钻头
 - 2、长柄螺丝刀
 - 3、防漏复合胶(硅胶)及填料枪
 - 4、铅笔
 - 5、防护眼镜
 - 6、砂纸
 - 7、切割锯
 - 8、修边机
- a、为了安装方便和安全,推荐使用上述工具；
b、安装时请小心,避免被工具划伤；
c、注意:仔细识别您所安装的水槽为台上盆或台下盆。

安装方法


(一)、台上盆安装说明:
(以下安装适用于大理石台面)

- 1、(如图1)在水槽在安装位置将水槽翻转位置,按住水槽,沿水槽边缘线画出轮廓线,不要使用擦不掉的记号笔。
- 2、(如图2)拿开水槽,在轮廓线内按开孔板的开孔尺寸画出切割线 注意:开孔尺寸要求准确,与边缘的距离足够安装紧固件。
- 3、(如图3)首先钻一个直径为10mm的孔在切割线内侧,用以放入切割锯锯条,沿着所画的线切割出水槽的位置,扶住切割部分以免切割口爆裂。用砂纸打平切口边缘,把水槽放入切口以检查是否合适。


在设计安装之前,请仔细阅读本产品的安装使用说明书



4、(如图4)在水槽切割线及盆边线之间填入硅胶,宽度为3.0-6.0mm。过宽会导致水槽与安装台之间密封不良,在安装水槽之前先安装龙头。

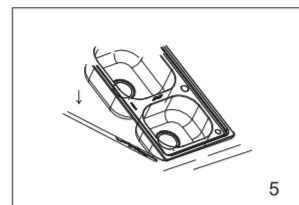


5、(如图5)放置水槽:将水槽前缘紧贴台面开口处的前缘并完全覆盖硅胶,再将水槽慢慢放下。

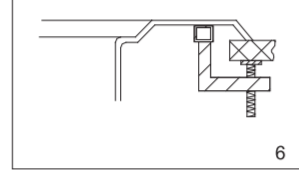


6、(如图6)在连接处(加强筋)处安装紧固件,注意:紧固过紧或过松都会导致安装错误甚至引起水槽损坏。正确的紧固步骤是:将紧固件从中间开始向两边逐个用手拧紧,再次检查水槽在台面上的位置,位置正确后,对所有的紧固件再拧紧1/4周,最后至锁紧为止。(紧固件根据需求配置,无配置可忽略此安装步骤。)


(二)、台下盆安装说明:
(以下安装适用于大理石台面)

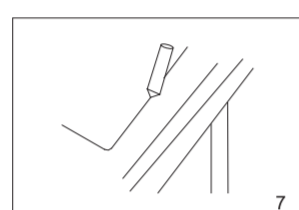


7、安装完毕后,把台面上的胶以及铅笔划痕擦干净,用软湿布或海绵再添加一些温和的清洁剂去除水槽上的油渍和手印,较严重的可掺合一些磨料轻轻擦洗。

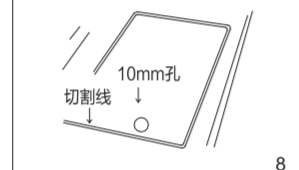


1、(如图7)将您的厨具台面清洁干净,把所提供的开孔模板放在需安装水槽的台面上,按住模板,用记号笔按模板外型画线,注意:不要用擦不掉的记号笔。

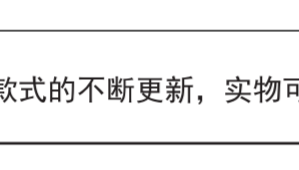


2、(如图8)拿开模板,首先在切割线内侧钻一个直径为10mm的孔,用以放入切割锯的锯条。沿着所画的切割线,切割出水槽的安装孔,同时扶住切割部分以免切割口爆裂。

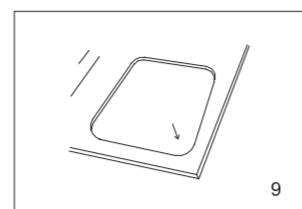


3、(如图9)用修边机、锉刀和砂纸修平切口边缘,修出所需的圆角。

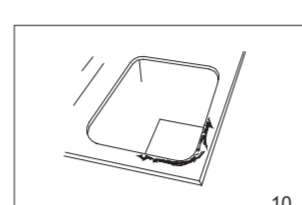


4、(如图10)把台面翻转,在切割线及盆边线之间涂上硅胶,宽度为3.0-6.0mm。注意硅胶的量,太多反而会造造成漏密封困难。

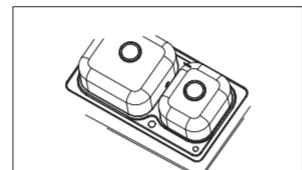

5、(如图11)将水槽对准位置粘贴到您的台面上。

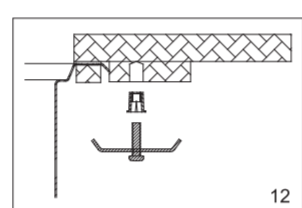

6、(如图12)在水槽四周的台面粘贴(15-20)mm厚的木板或大理石条,必须牢固。再在木板条(或大理石条)上打好孔,将膨胀螺钉打入孔内,用紧固锁紧件固定水槽。(紧固件根据需求配置)

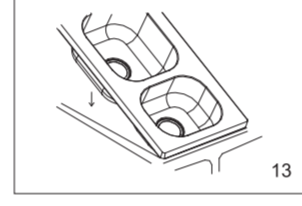

7、(如图13)待粘帖牢固后,将装好水槽的台面翻转,并安装在您的橱柜上。

8、安装完毕后,把台面上的复合胶以及铅笔划痕擦干净,用湿布或海绵再添加一些温和的清洁剂去除水槽上的油渍和手印,较严重的可掺合一些磨料轻轻擦洗。

产品说明

1、本公司水槽是采用优质304不锈钢制造。该材质特点耐锈抗氧化,可长时间保持你的水槽亮丽。但如果你使用和保养不当,也会导致水槽表面出现“浮锈”和“霉斑”。

原因有如下几点:

- a、在厨房装修时,如有水水泥、瓷灰或空气中含有“铁”“酸性”物质成分的灰尘等残留在水槽表面,没及时冲洗及擦干,之后几天又使用它,就会在水槽表面出现轻微的“锈斑”、“霉斑”、“白色的水印”等现象,特别是潮湿天气更为明显。
- b、由于我国部分地区的水质或管道原因,水中铁金属含量偏高导致与水接触的金属表面也会产生轻微的“锈斑”。
- c、在新房装修中含有含矿物质的酸、碱性的粉末飘落水槽表面也容易引起“锈斑”。
- d、菜刀、剪刀、开瓶器的带铁物质的工具未擦拭干净(锈斑),长期与水槽接触也会将锈迹“传染”到水槽上。
- e、化学剂、有害的清洗剂、油漆、酱油油污等,也会导致水槽出现“霉斑”和“锈点”。

预防和处理:

- a、厨房装修时应及时把水槽的残留物冲洗干净。
- b、万一出现“浮锈”“霉斑”可抹少许牙膏在软布上对准“污点”进行擦拭,即可去除。
- c、如“锈斑”严重的,可到卖不锈钢管或制品的店购买“洗钢水”按说明操作,把锈斑洗掉。(洗钢水用法简述:用清水打湿锈点,用棉签沾少许“洗钢水”擦拭锈点处,10秒钟内再用清水清洗即可)。

使用注意事项

- 1、不能用钢丝球刷水槽,建议采用海绵或者棉布。
- 2、应经常清洗,以免因长期使用留下污垢,当用温和的洗涤剂清洗时,建议先浸泡2分钟,然后轻轻擦洗。
- 3、请专业人士进行水槽安装。
- 4、避免尖锐物品碰撞水槽。
- 5、不要在水槽里使用橡皮胶垫,因为橡皮胶垫下的污垢很难清洗。
- 6、含重金属成分的水会导致水槽变色或产生锈斑,发现这种现象可在每次用完之后用毛巾擦干。
- 7、尽量避免含化学成分的用品与水槽长时间接触,如遇到此类情况,则用清水冲洗干净并立即擦干。
- 8、安装人员在安装产品作业时,应注意人身防护,避免受到伤害。

用户	
销售店/安装店	
购买日	
保修期	家用:自购买日起保修5年; 工程/定制:质保期以双方约定为准。

- ※ 若上栏内容未记录,该保证书可能影响售后服务。因此请用户购买时对记录内容进行确认。
- ※ 本保证书中的保修项目仅限于保证书中所约束的免费项目进行维修。
- ※ 在保修期间,若产品发生故障(漏水、渗漏),请用户向销售店或安装店出示保证书及购买发票、提出修理要求。
- ※ 本保证书只适用于非商业用途的购买者。
- ※ 水槽表面易清洁涂层属于易损件,会在正常使用中效果逐渐降低,此项内容不在质保范围内。

免费维修规定

1. 保修期限内,在用户正确按说明书等指示,使用本公司产品的情况下,本公司将对有故障产品进行免费维修。
2. 在保修期内发生损坏需要得到免费维修时,请持本保证书和购买发票委托安装店或销售店办理。
3. 在保修期内,下面所列场合的维修为有偿维修。
 - a. 使用不当或私自进行的不当修理及改造所造成的故障及损伤。
 - b. 安装施工时的不注意或过失造成的故障及损伤。
 - c. 安装后又拆移等原因造成的故障及损伤。
 - d. 砂粒或污物等造成的损伤。
 - e. 由于日常的维护保养不当造成的脏污、电镀部分生锈等不良。
 - f. 由于火灾、地震、水灾、雷击或其它自然灾害、公害、气害(液化气)、盐害、冻害(低温)及异常电压等原因造成的故障及损伤。
 - g. 本保证书中用户姓名、销售店、安装店、购买日期未填写的场合。
 - h. 不能出示购买发票的场合。
4. 本保证书丢失不补,请顾客妥善保管。
5. 未按条款操作造成的产品损坏及财产损失,不在公司免费更换及赔偿之列。

注:商用产品以商用合同签订为准。

合格证	执行标准: 见包装箱上标签	生产日期:
	产品型号: 见包装箱上标签	
	产品名称: 见包装箱上标签	

Important Tips


1. Please read the this instructions carefully before installation;
2. The manual contains product descriptions and instructions;
3. Please carefully read and preserve this instructions carefully for further reference and use;
4. This manual is only used for normal user installation;
5. Special circumstances depends on as the case might be.

Tools needed for installation


1. Motor drill and 10mm bit
 2. Long handle screwdriver
 3. Leak-proof composite glue (silica gel) and packing gun
 4. Pencil
 5. Protective Glasses
 6. Sand paper
 7. Slitting saw
 8. Trimming machine
- Use the recommended tools for convenient installation and safe. Be careful to avoid tool scratches.
Note: Check carefully whether the sink to be installed is above or under counter basin.

Installation Instructions

1. Installation Instructions of above counter sink
The following installation is for marble countertops.

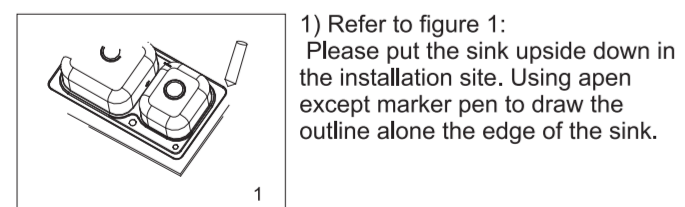


1) Refer to figure 1:
Please put the sink upside down in the installation site. Using open except marker pen to draw the outline along the edge of the sink.

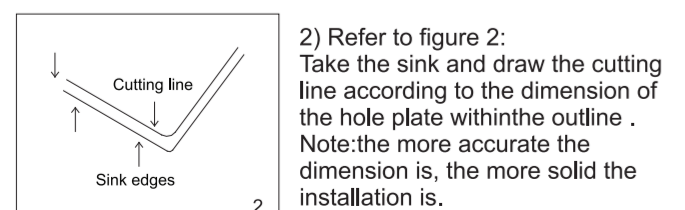


2) Refer to figure 2:
Take the sink and draw the cutting line according to the dimension of the hole plate within the outline. Note: the more accurate the dimension is, the more solid the installation is.


Please follow the installation instructions correctly to ensure the full efficiency of this product.

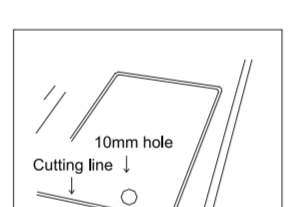


3) Refer to figure 3:
First drill a 10mm diameter hole within the cutting line for placing a dicing saw, cut out the location hole inside the cuttingline for placing dicing saw. Hold on the cutting edge to avoid cracks. Use sandpaper to polish the cutting edge, put the sink in the incision to check if it is fit.

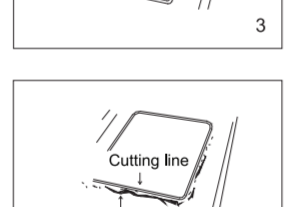

4) Refer to figure 4:
Fill transparent silica gel between the cutting line of sink and sink edges, the width is 3.0 to 6.0mm. Too loose can cause incompletely seal between the sink and install counter. Install faucet before the sink.

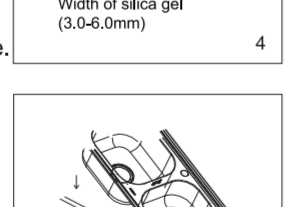


5) Refer to figure 5:
Placing the sink: The front edge of sink is close to the front edge of opening counter, then cover the front side with silica gel completely, and then slowly put down the sink.

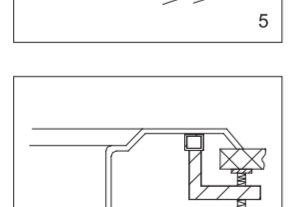


6) Refer to figure 6:
Install strengthening parts (reinforcing rib) in connections. Note: Too tight or too loose will result failure in installation, even cause damage to the sink. Correct tightening steps: tighten the strengthening parts one by one from the middle to both sides with hand, check the location of the sink on counter, if the position is correct, tighten the all strengthening a quarter of circuit until tightened up. (Strengthening parts are configured according to requirements. If there is no configuration, this installation step can be ignored.)


7) After installation, clean the plastic and pencil scratches of counter, remove the grease and fingerprints on the sink with a soft damp cloth or sponge which have added some mild detergent, for more serious, blend some abrasives and scrub lightly if more severe.

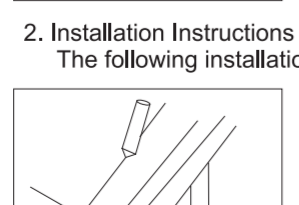


1) Refer to figure 7:
Clean your kitchen table, use the hole template on the counter of the sink to be installed, hold down the template, drawing line along the edge of template with a mark pen.
Note: Do not use indelible mark pen.

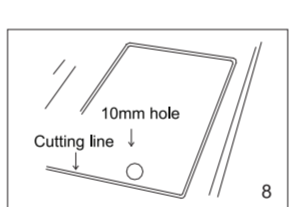


2) Refer to figure 8:
Remove the template, first drill a 10mm diameter hole inside the cuttingline for placing dicing saw. Hold on the cutting edge to avoid cracks.

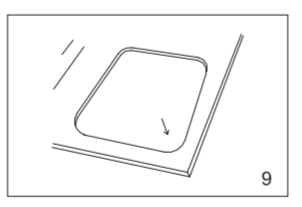


3) Refer to figure 9:
Trim off the edges with the trimmer, rasper and sandpaper.

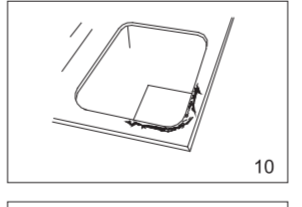


4) Refer to figure 10:
Turn over the counter, coat silica gel between the cutting line of sink and sink edges, the width is 3.0 to 6.0mm. Pay attention to the amount of silica gel, too many silica gel will cause difficulties in sink seal.

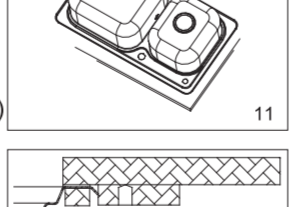

5) Refer to figure 11:
Take the sink aiming at the position and paste it on counter.

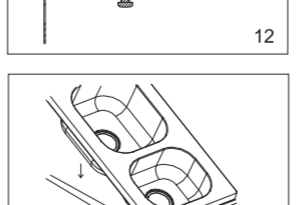

6) Refer to figure 12:
The countertop surrounding the sink should be stucked a plank or a marble strip (both 15-20mm) firmly. Then drilling holes on it, putting the screws in holes, and screwing the jam nuts is to make the sink tight. (Fix that fasteners per specification)

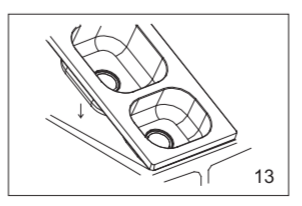

7) Refer to figure 13:
After a solid paste, turn over the counter of the installed sink, and install into your cabinet.

8) After installation, clean the plastic and pencil scratches of counter, remove the grease and fingerprints on the sink with a soft damp cloth or sponge which have added some mild detergent, for more serious, blend some abrasives and scrub lightly if more severe.

Product Descriptions

1. Jomoo's sinks are made of high-quality 304 stainless steel, the material features: rust resistant and oxidation, keep the sink bright for a long time. But if not properly used or maintained, rust and visible mold will emerge.

Reasons are as follows:

- a. In the kitchen renovation, if any litter, cement dust, ceramic dust, or dust which contain iron or acid composition and other residue on the surface of sink, not promptly washed and dried, not use it in the next few days, the surface of sink will emerge rust mold, white watermark and so on, especially in a humid weather, it is more obvious.
- b. In the new house decorations, if the powder contain mineral acid or alkaline floated on the tank surface, it will cause rusting.
- c. Kitchen knives, scissors, bottle opener and other substances with iron tools are not wipe clean (rust), rust will spread to sink after engagement with the tank for long time.
- d. Chemicals, harmful detergents, paint, oil and other sauces can cause visible mold and rust spots.

Protective measures and treatment:

1. Flush away the remaining water in the sink while kitchen renovations.
2. If floating rust or visible mold emerges, wipe a little toothpaste on a soft cloth and clean.
3. If rust is severe, purchase cleaning detergent for stainless steel, wash the rust according to the instructions. (Usage of this stainless steel detergent: first wet rust with water, clean with a cotton swab which have dipped with a little cleaning detergent for stainless steel, clean with water in 10 seconds).

Application Tips

1. Do not use steel ball to brush the sink, sponge or gauze are recommended.
2. Should clean frequently to avoid dirt left. Suggest to soak in mild detergent for 2 minutes and then clean softly.
3. Let professionals to install the sink.
4. Avoid sharp objects bump into the sink.
5. Do not use the rubber washer in the sink, because the dirt under the rubber washer is difficult to clean.
6. Water contain heavy metals can cause discoloration or rust spot on sink, for such phenomenon, dry with a towel right after use.
7. Try to avoid long time chemical composition contacts, in such situation, rinse and dry immediately.
8. When installing products, Installer should pay attention to their own protection.

Customer	
Retail Store/Install Store	
Purchase Date	
Warranty Duration	Household: It would have 5 years defects liability period as of purchase date. Engineering/Customization: the warranty period shall be subject to the agreement of both parties.

1. If the above columns are not complete, This warranty may affect the after-sales service. Please confirm the above contents when you purchase.
2. The free guarantee repairs are limited to the listed items on the warranty.
3. Within warranty period, if any technical faults occur, customer should present warranty and purchase invoice to retail shop or install shop, for repair request.
4. This Warranty only applies to the buyers who buy it for a non-commercial use.
5. The surface coating is vulnerable parts whose functioning will gradually decreasing, and not included in warranty.

Guarantee Repairs Claims

1. Within warranty period, Jomoo is responsible for repairing any deflection products for free in case that customer use these products according to the instructions manual correctly etc.
2. Please bring this warranty and purchase invoice when the product needs guarantee repairs within warranty period.
3. Within warranty period, the listed situations below need to pay.
 - a. The malfunction and damage caused by improper use and repair or reconstruct unauthorized.
 - b. The malfunction and damage caused by errors or faults during installation.
 - c. The malfunction and damage caused by removing after installation or other factors.
 - d. The damage caused by sands or dirt.
 - e. The damage caused by daily improper maintenance and rust on finishes and so on.
 - f. Damages caused by fires, earthquakes, floods, lightning or other natural disasters, pollution, harmful gas (LPG), salt damage, freezing (low temperature) and abnormal voltage etc.
 - g. The occasions which the user name of the book, sales shop, installation stores and the purchase date are not complete.
 - h. The occasions which purchase invoices are not available.
4. This warranty can not be replaced if missed, please keep safe.
5. Any product damage, property damage and personal injury caused by terms of operation fails is out of the free replacement and compensation list.

Note: Commercial products shall be subject to commercial contracts.

QC	Standard: Refer to package label	Date:
	Product Model: Refer to package label	
	Product Name: Refer to package label	